




Crosby lifting clamps



For lifting in any direction

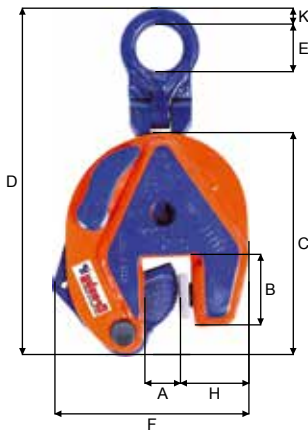

Part no.	WLL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	Weight kg
IPU10-0500	0.5	0-16	44	128	228	40	115	41	28	11	1.9
IPU10-1000	1.0	0-20	45	139	222	40	126	41	38	11	2.4
IPU10-2000	2.0	0-35	78	201	372	70	190	61	55	16	8.5

Other IP Crosby items on request.
Ask for separate catalog.

- Available in capacities of 0,5 thru 30 metric tonnes
Higher WLL and jaw openings are available upon request).
- Wide variety of jaw openings available: 0 to 155mm | 0° - 6.13°.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (CrosbyIP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body.
Serial number is included on the test certificate with maintenance and warranty logbook.
- Full 180° turning range for material transfer, turning or moving.
- Lock open, lock closed ability with latch for pretension on material and then release of material.
- Optional IP-5000 Stinger assembly available.
Allows for easy connection between the clamp and hoist hook.
- Minimum WLL of 10% of Maximum WLL.
- Maintenance replacement kits are available.
- Manufactured by a ISO 9001 facility.
- All sizes are RFID EQUIPPED.



The IPU10 vertical lifting clamp is used for the lifting, turning, moving or vertical transfer of sheet, plates, or fabrications from horizontal to vertical and down to horizontal (180°) as needed. The hinged hoisting eye allows for the clamp to place and lift the load from any direction, or with a multiple leg sling without side loading the clamp. The IPU10 lifting clamps with a WLL of 12t and up are fitted with special hook-up facilities to enable easy placement of the clamp in horizontal position.

