

## BMM Trawl blocks

Roller bearing · Thrust bearing on top · Galvanized

Part no.	WLL 5:1 ton	Max load on headfitting ton	Test load ton	A mm	B mm	B <sub>1</sub> mm	D mm	E mm	F mm	F <sub>1</sub> mm	G mm	J mm	Max wire mm	Weight kg
*K370-2A	13.0	26.0	52	580	140	140	370	260	120	245	285	12	28	115.0
*K400-2A	15.0	30.0	55	670	180	180	400	245	180	305	300	15	28	185.0
KH400-2A	20.0	40.0	70	685	180	180	400	285	180	334	300	20	28	225.0
K500-2A	20.0	40.0	70	785	180	180	500	285	185	345	380	20	30	275.0
K600-2A	30.0	60.0	95	910	180	180	600	310	190	380	480	20	32	360.0
K650-2A	30.0	60.0	95	985	240	220	650	335	225	415	500	20	34	500.0
KH650-2A	40.0	80.0	120	975	240	220	650	337	225	415	500	20	38	530.0
K800-2A	40.0	80.0	120	1125	240	220	800	325	240	440	600	20	38	750.0
KH800-2A	60.0	120.0	165	1200	240	230	800	400	242	500	600	25	40	895
K1000-2A	60.0	120.0	165	1485	260	240	1000	485	270	570	825	25	44	1320.0
K1200-2A	70.0	140.0	195	1640	260	240	1200	440	264	530	1020	30	44	1750.0

\* Are only supplied with full sideplates.

BMM-Blocks must be ordered with one of the following:


- E Swivel eye.
- F Swivel fork.
- S Swivel shackle eye.
- I Icedavit eye.

On order add letter, e.g. K500-2AE

Against extra charge all blocks are available with:

- C Tested with certificate.
- H Flame hardened sheave.

On order add letter, e.g. K500-2AEG

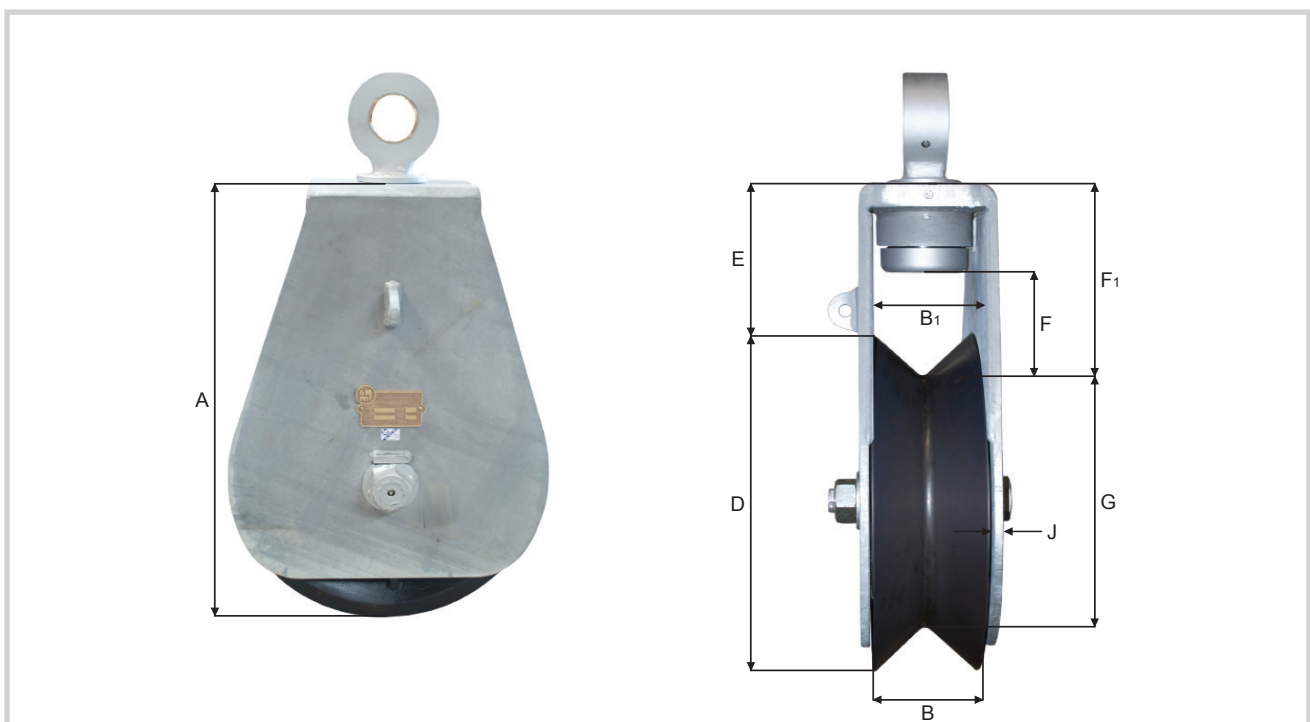


## Top fittings

Part no.	Swivel eye				Swivel fork					Swivel shackle eye				
	M mm	N mm	O mm	P mm	K mm	L mm	M mm	N mm	R mm	P mm	L mm	M mm	R mm	P mm
K370	70	110	50	220	165	39	70	103	50	215	51	72	60	145
K400	70	110	50	225	195	51	85	115	65	260	51	72	60	145
K500	75	140	55	280	195	51	85	115	65	260	58	80	70	160
K600	100	155	70	335	230	58	90	140	75	305	-	-	-	-
K650	100	155	70	335	230	58	90	140	75	305	-	-	-	-
K800	100	190	70	335	250	81	90	180	90	340	-	-	-	-

## Top fittings

### Eye for icedavit




Part no.	L mm	M mm	P mm	R mm	N mm	Weight kg
K400-2A	78	70	190	85	115	91
KH400-2A	78	78	190	85	115	91
K500-2A	78	78	190	85	115	91
K600-2A	106	108	240	100	135	116
K650-2A	106	108	240	100	135	116
KH650-2A	106	108	260	110	135	116
K800-2A	106	108	260	110	145	116
KH800-2A	125	168	300	130	170	150
K1000-2A	125	168	300	130	170	150
K1200	125	168	304	130	174	170

## Sheaves

### Roller bearing

Part no.	B mm	D mm	R mm	S mm	Weight kg
SK370-2	140	370	100	45	50.50
SK400-2	180	400	140	60	85.00
SK500-2	180	500	170	70	130.00
SK600-2	180	600	170	70	150.00
SK650-2	240	650	170	70	240.00
SK800-2	240	800	200	85	370.00
SK1000-2	260	1000	245	123	600.00
SK1200-2	260	1200	245	123	850.00

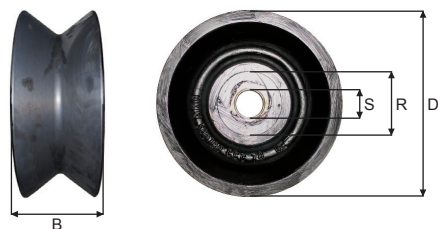

## Pins

Part no.	X mm	Y mm	Z mm	Weight kg
PK370-2	234	45	162	3.20
PK400-2	330	60	212	10.90
PK500-2	340	70	225	12.90
PK600-2	340	70	225	12.90
PK650-2	404	70	285	14.60
PK800-2	427	85	287	21.70
PK1000-2	475	123	323	33.00
PK1200-2	485	123	323	35.00

