

BMM Snatch blocks

Galvanized · Bronze bushing

Part no.	WLL 5:1 ton	Max load on headfitting ton	Test load ton	A mm	B mm	D mm	I mm	Weight kg
KS10	1.0	2.0	4.0	220	45	83	30	4.7
KS20	1.5	3.0	6.0	220	45	83	30	5.4
KS30	2.2	4.4	8.8	270	45	110	30	8.5

All snatch blocks must be closed during operation.

BMM-Blocks must be ordered with one of the following:


- E** Swivel eye.
- R** Firm eye.

On order add letter, e.g. KS10EG

Against extra charge all blocks are available with:

- C** Tested with certificate.

On order add letter, e.g. KS10EGC

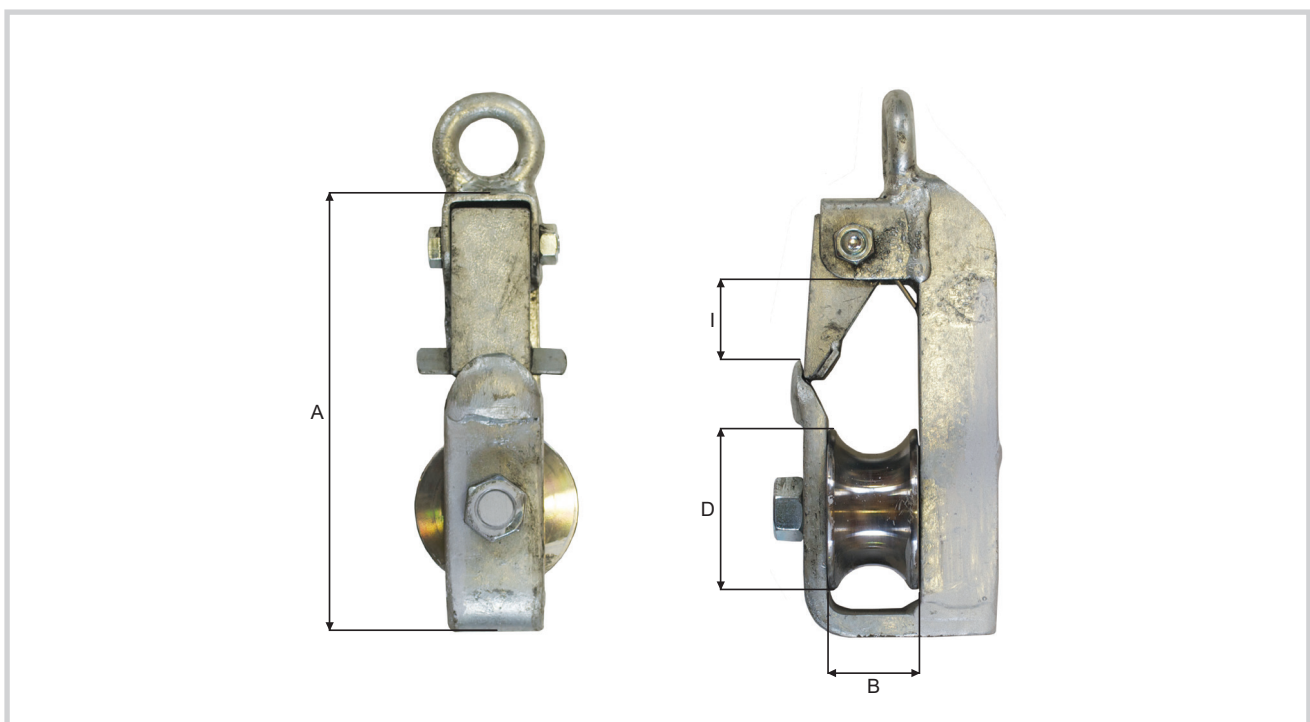


Top fittings

Part no.	Firm eye			Swivel eye			
	M mm	O mm	P mm	M mm	N mm	O mm	P mm
KS10	32	14	58	38	40	16	92
KS20	32	14	58	38	40	16	92
KS30	40	16	72	38	48	19	112

Sheaves

Part no.	B mm	D mm	S mm	Weight kg
SKS10	45	83	20	1.50
SKS20	45	83	20	1.50
SKS30	45	110	20	2.30

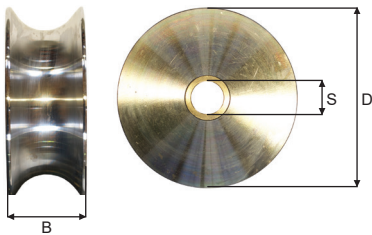

Pins

Part no.	X mm	Y mm	Z mm	Weight kg
PKS10	103	20	63	0.30
PKS20	103	20	63	0.30
PKS30	133	20	95	0.40

