

BMM Snatch blocks

Roller bearing · Blue painted

Part no.	WLL 5:1 ton	Max load on headfitting ton	Test load ton	A mm	B mm	D mm	E mm	F mm	F ₁ mm	G mm	I mm	J mm	Max wire mm	Weight kg
KS230-2	7.0	14.0	28.0	380	57	230	120	70	140	195	42	8	28	31.0
KS300-2	10.0	20.0	40.0	440	66	300	130	70	150	260	45	10	28	51.0
KS400-2	15.0	30.0	60.0	595	70	400	180	105	210	345	70	12	28	106.0
KS500-2	20.0	40.0	80.0	800	76	515	220	130	260	445	85	15	30	165.0

All snatch blocks must be closed during operation.

BMM-Blocks must be ordered with one of the following:


- E** Swivel eye.
- S** Swivel shackle eye.

On order add letter, e.g. KS230-2E

Against extra charge all blocks are available with:

- C** Tested with certificate.
- H** Flame hardend sheave.

On order add letter, e.g. KS230-2EH

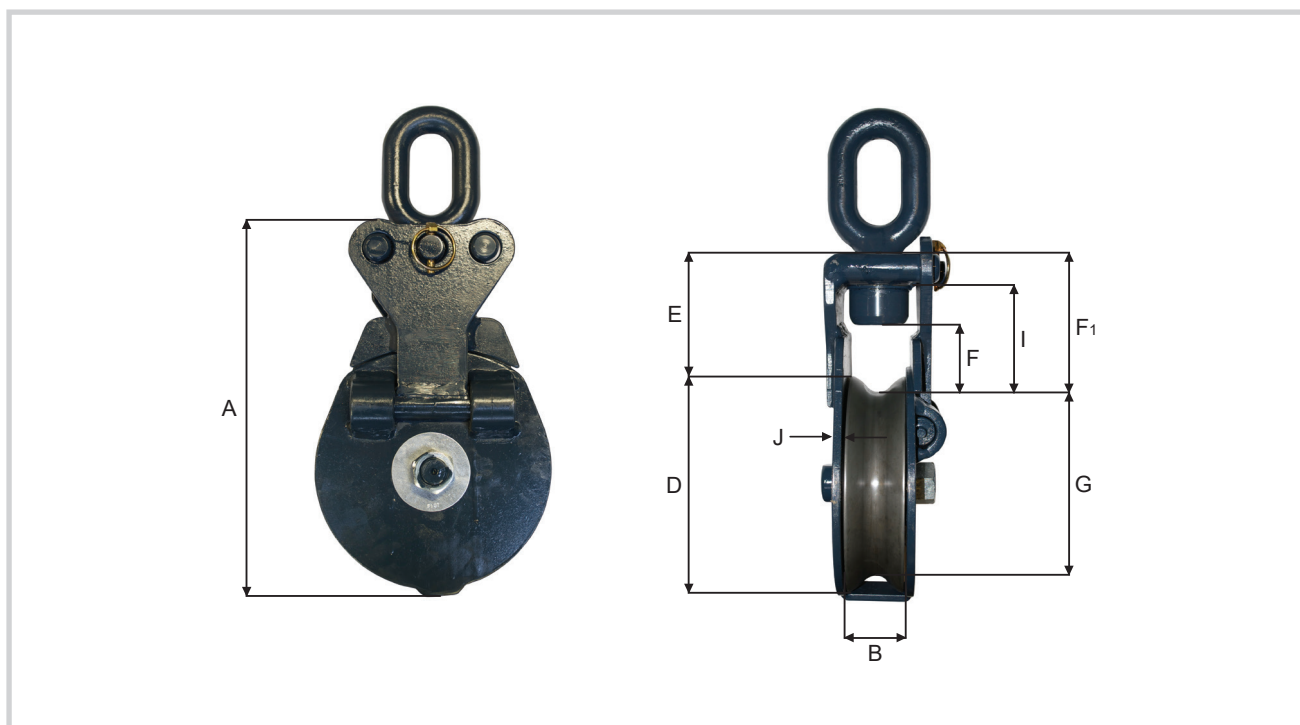


Top fittings

Part no.	Swivel eye				Swivel shackle eye			
	M mm	N mm	O mm	P mm	L mm	M mm	R mm	P mm
KS230-2	40	90	32	153	29	42	40	100
KS300-2	48	105	38	203	43	58	50	125
KS400-2	58	110	50	225	51	72	60	150
KS500-2	75	140	55	280	58	80	70	160

Sheaves

Roller bearing


Part no.	B mm	D mm	R mm	S mm	Weight kg
SKS230-2	57	230	80	35	12.80
SKS300-2	66	300	100	45	18.20
SKS400-2	70	400	128	60	35.00
SKS500-2	70	515	140	65	42.50

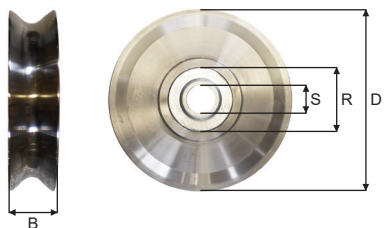

Pins

Ball bearing

Part no.	X mm	Y mm	Z mm	Weight kg
PKS230-2	118	35	78	1.10
PKS300-2	140	45	79	1.19

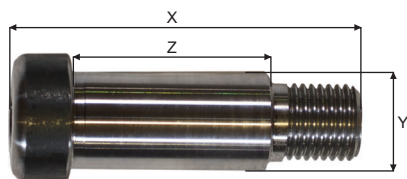

Bronze bushing

Part no.	X mm	Y mm	Z mm	Weight kg
PKS400-2	217	60	97	8.00
PKS500-2	242	65	112	9.50

