

BMM Snatch blocks


Galvanized

Part no.	WLL 5:1	A mm	B mm	D mm	M mm	L mm	N mm	Max wire mm	Weight kg
KSW1-NG	1.0	190	22	80	13	23	48	16	1.0
KSW1-NG-30	1.0	190	30	80	13	23	48	24	1.2
KSW1-1G	1.0	190	22	80	13	23	48	16	1.5
KSW1-1G-30	1.0	190	30	80	13	23	48	24	1.8
KSW1-0G	1.0	190	22	80	13	23	48	16	1.5
KSW1-0G-30	1.0	190	30	80	13	23	48	24	1.8
KSW2-NG	2.0	255	24	110	15	28	56	18	1.9
KSW2-1G	2.0	255	24	110	15	28	56	18	2.9
KSW2-0G	2.0	255	24	110	15	28	56	18	3.0
KSW3-NG	3.0	350	28	150	16	40	60	20	4.0
KSW3-1G	3.0	350	28	150	16	40	60	20	6.3
KSW3-0G	3.0	350	28	150	16	40	60	20	6.4

BMM Snatch blocks

Stainless steel


Part no.	WLL 5:1	A mm	B ton	D mm	M mm	L mm	N mm	Max wire mm	Weight kg
KSW1-1SS	1.0	190	22	80	24	13	48	16	1.6
KSW2-1SS	2.0	255	24	110	28	15	56	20	2.9

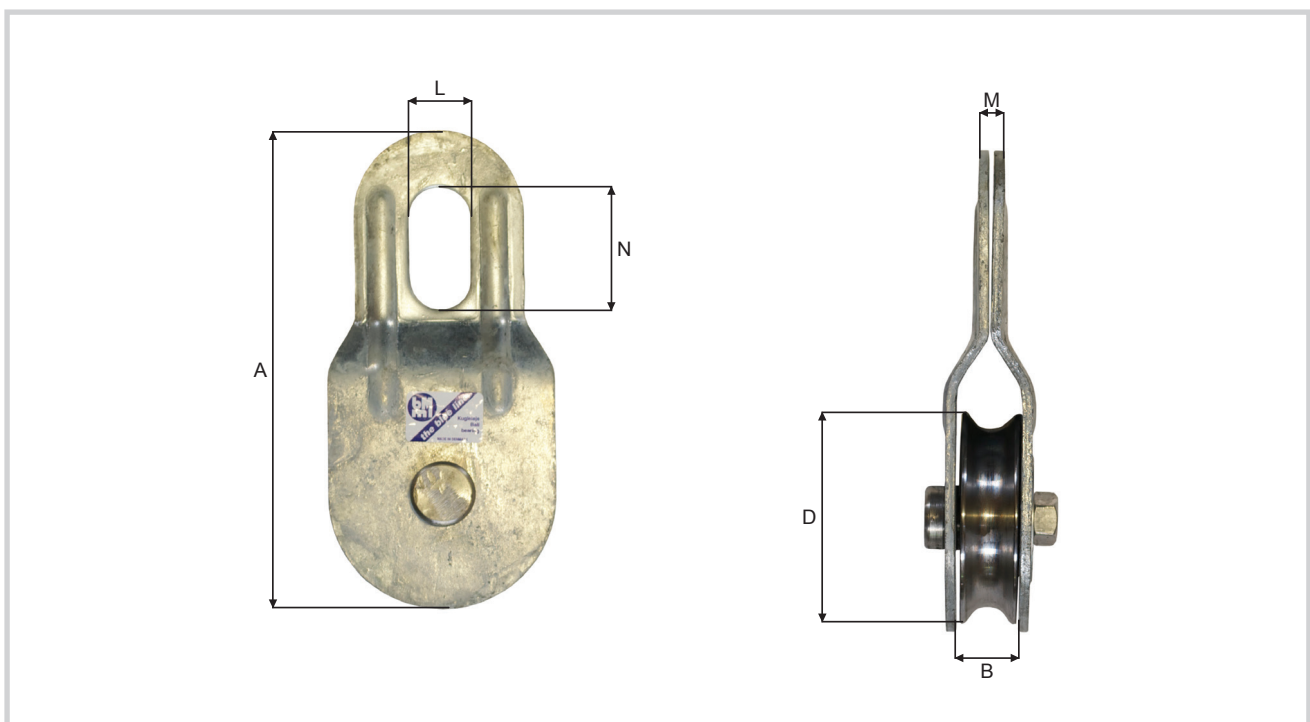

Sheaves


Ball bearing

Part no.	B	D	R	S	Weight
	mm	mm	mm	mm	kg
SKSW1-N	22	80		17	0.15
SKSW1-1	22	80	40	17	0.60
SKSW1-1SS	22	80	40	17	0.60
SKSW2-N	24	110		20	0.25
SKSW2-1	24	110	47	20	1.25
SKSW2-1SS	24	110	47	20	1.25
SKSW3-N	28	150		25	0.55
SKSW3-1	28	150	52	20	2.65

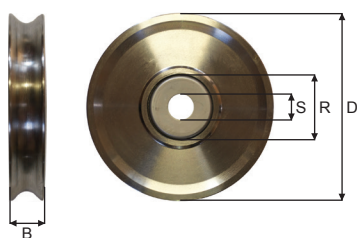

Bronze bushing


Part no.	B	D	S	Weight
	mm	mm	mm	kg
SKSW1-0	22	80	20	0.75
SKSW2-0	24	110	25	1.30
SKSW3-0	28	150	25	2.60



Pins

Ball bearing

Part no.	X	Y	Z	Weight
	mm	mm	mm	kg
PKSW1-N	50	17	28	0.10
PKSW1-1	50	17	28	0.10
PKSW1-1SS	50	20	28	0.10
PKSW2-N	52	20	30	0.15
PKSW2-1	52	20	30	0.15
PKSW2-1SS	52	20	30	0.15
PKSW3-N	67	20	41	0.20
PKSW3-1	67	20	41	0.20

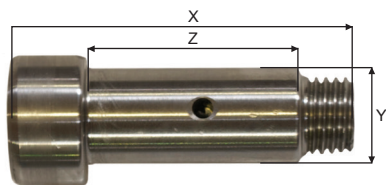

Bronze bushing

Part no.	X	Y	Z	Weight
	mm	mm	mm	kg
PKSW1-0	57	20	28	0.10
PKSW2-0	61	25	30	0.15
PKSW3-0	67	25	35	0.20

