

BMM Tackle blocks · Double

Galvanized

Part no.	WLL 5:1 ton	Max load on headfitting ton	Test load ton	A mm	B mm	D mm	E mm	F mm	F ₁ mm	G mm	J mm	Max wire mm	Weight kg
KT230D-2	9.0	18.0	36.0	405	57	230	150	110	168	195	8	28	54.0
KT300D-2	11.0	22.0	44.0	480	66	300	155	100	175	260	10	28	86.0
KT400D-2	15.0	30.0	60.0	645	74	400	215	150	240	345	12	28	166.0
KT500D-2	20.0	40.0	80.0	770	82	515	250	160	285	445	15	30	251.0

2: Roller bearing

BMM-Blocks must be ordered with one of the following:


- E** Swivel eye.
- F** Swivel fork.
- S** Swivel shackle eye.

On order add letter, e.g. KT230D-2E

Against extra charge all are blocks available with:

- B** Becket.
- C** Tested with certificate.
- H** Flame hardend sheave.

On order add letter, e.g. KT230D-2EG

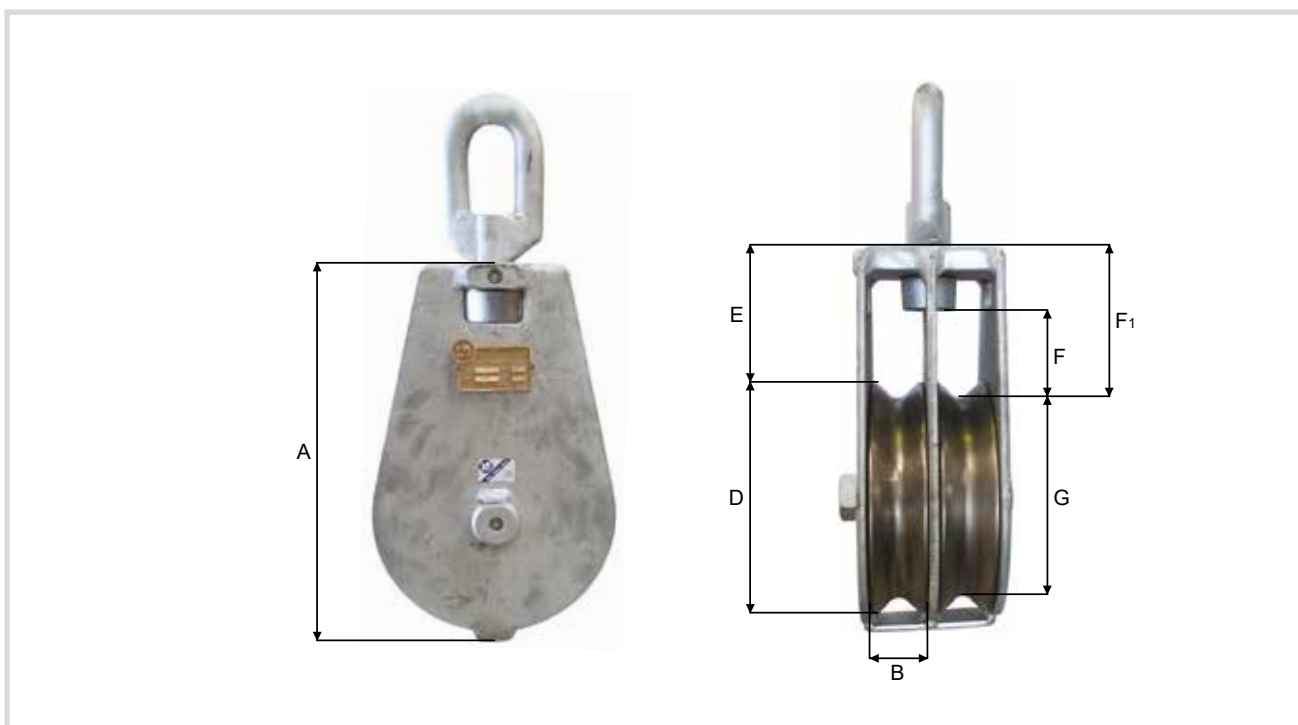


Top fittings

Part no.	Swivel eye				Swivel fork						Swivel shackle eye			
	M mm	N mm	O mm	P mm	K mm	L mm	M mm	N mm	R mm	P mm	L mm	M mm	R mm	P mm
KT230D-2	48	90	32	180	140	29	52	84	35	175	39	50	45	115
KT300D-2	48	90	38	210	140	29	52	84	35	175	43	58	50	125
KT400D-2	58	110	50	235	195	51	85	115	65	260	51	73	60	150
KT500D-2	75	140	55	280	195	51	85	115	65	260	58	80	70	160

Sheaves


Ball bearing

Part no.	B	D	R	S	Weight
	mm	mm	mm	mm	kg
SKT230-2	57	230	80	35	12.80
SKT300-2	66	300	100	45	18.20

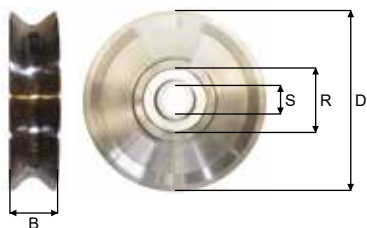

Roller bearing


Part no.	B	D	R	S	Weight
	mm	mm	mm	mm	kg
SKT400-2	70	400	120	60	35.00
SKT500-2	76	515	140	65	42.50

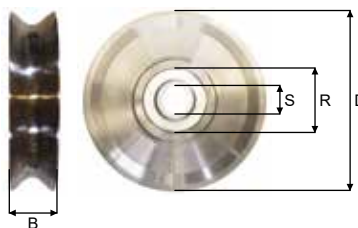

Pins

Ball bearing

Part no.	X	Y	Z	Weight
	mm	mm	mm	kg
PKT230D-2	188	35	140	1.60
PKT300D-2	205	45	162	2.00

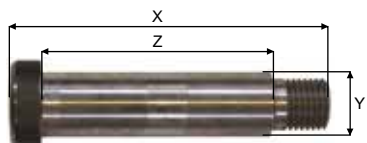

Roller bearing

Part no.	X	Y	Z	Weight
	mm	mm	mm	kg
PKT400D-2	305	60	183	10.00
PKT500D-2	340	65	210	12.00

