

BMM Tackle blocks · Triple

Galvanized

Part no.	WLL 5:1 ton	Max load on headfitting ton	Test load ton	A mm	B mm	D mm	E mm	F mm	F ₁ mm	G mm	J mm	Max wire mm	Weight kg
KT230T-2	9.0	18.0	36.0	405	57	230	150	110	168	195	8	28	75.0
KT300T-2	11.0	22.0	44.0	480	66	300	155	100	175	260	10	28	122.0

For synthetic rope all blocks can be supplied with stainless sheave.

BMM-Blocks must be ordered with one of the following:


- E** Swivel eye.
- F** Swivel fork.
- S** Swivel shackle eye.

On order add letter, e.g. KT230T-2E

Against extra charge all blocks are available with:

- B** Becket.
- C** Tested with certificate.
- H** Flame hardend sheave.
- 2** Rollerbearing.

On order add letter, e.g. KT230T-2EG

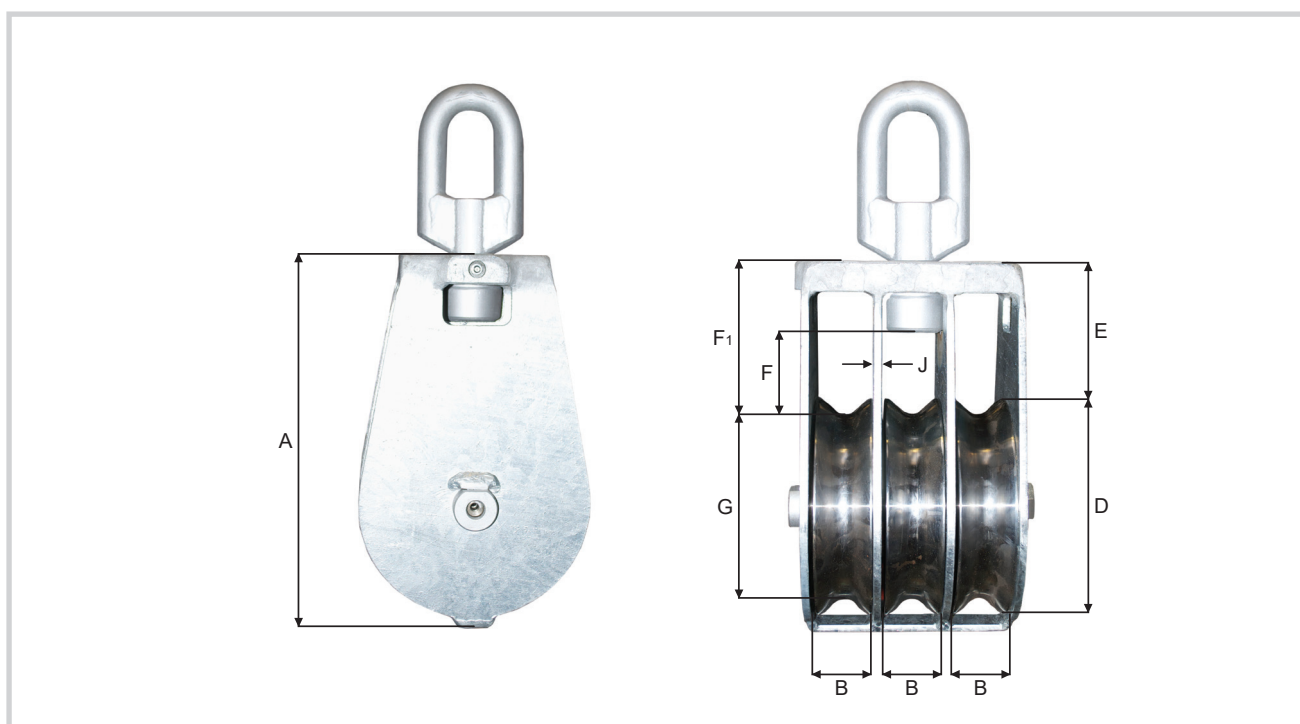


Top fittings

Part no.	Swivel eye				Swivel fork						Swivel shackle eye			
	M mm	N mm	O mm	P mm	K mm	L mm	M mm	N mm	R mm	P mm	L mm	M mm	R mm	P mm
KT230T-2	48	90	32	180	140	29	52	84	35	175	39	50	45	115
KT300T-2	48	105	38	210	140	29	52	84	35	175	43	58	50	125

Sheaves

Ball bearing

Part no.	B mm	D mm	R mm	S mm	Weight kg
SKT230-2	57	230	80	35	12.80
SKT300-2	66	300	100	45	18.20

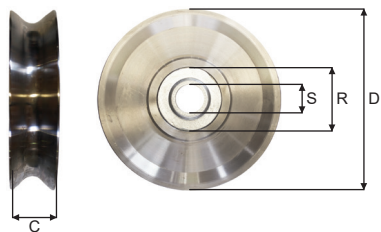

Pins

Part no.	X mm	Y mm	Z mm	Weight kg
PKT230T-2	256	35	208	2.30
PKT300T-2	385	45	242	2.90

