



Lashing belts

Two-parted · European standard · Complete lashing

Part no.	Description	Colour	Width	Breaking strength ton	EN 12195-2 LC daN	EN 12195-2 STF daN
LTS-05100-BLUE	0.4-9.5 m with wire hook	Blue	50	5	2000	340
LTS-05100-ORANGE	0.5-9.5 m with wire hook		50	5	2000	340
LTS-01050	0.4-4.6 m with wire hook	Black	25	0.8	400	75



The lashing must take:

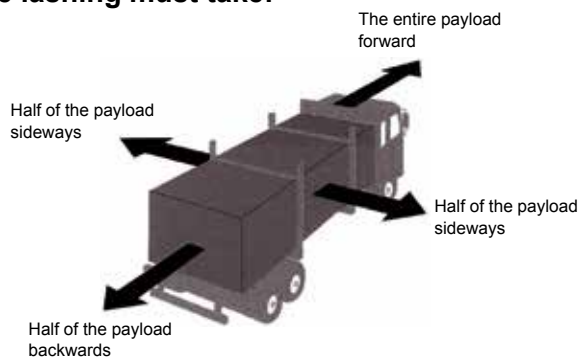

Gunnebo lifting lashings with a breaking load of 500 kg. and above are clearly marked with labels.

The dimensioning of a lashing arrangement must be based on local regulations.

Technical Explanations for:

LC = Lashing capacity:

Safety factor:

Elongation:

Marked:

Standard EN 12195-2

Maximum force for use in straight pull that a web lashing is designed to sustain in use.

2:1 complete system and metal parts.

3:1 non-sewn polyester webbing.

Maximum 7% when polyester webbing subjected to the LC.

Traceability code similar to lifting products. A protected label ensures traceability at all circumstances.